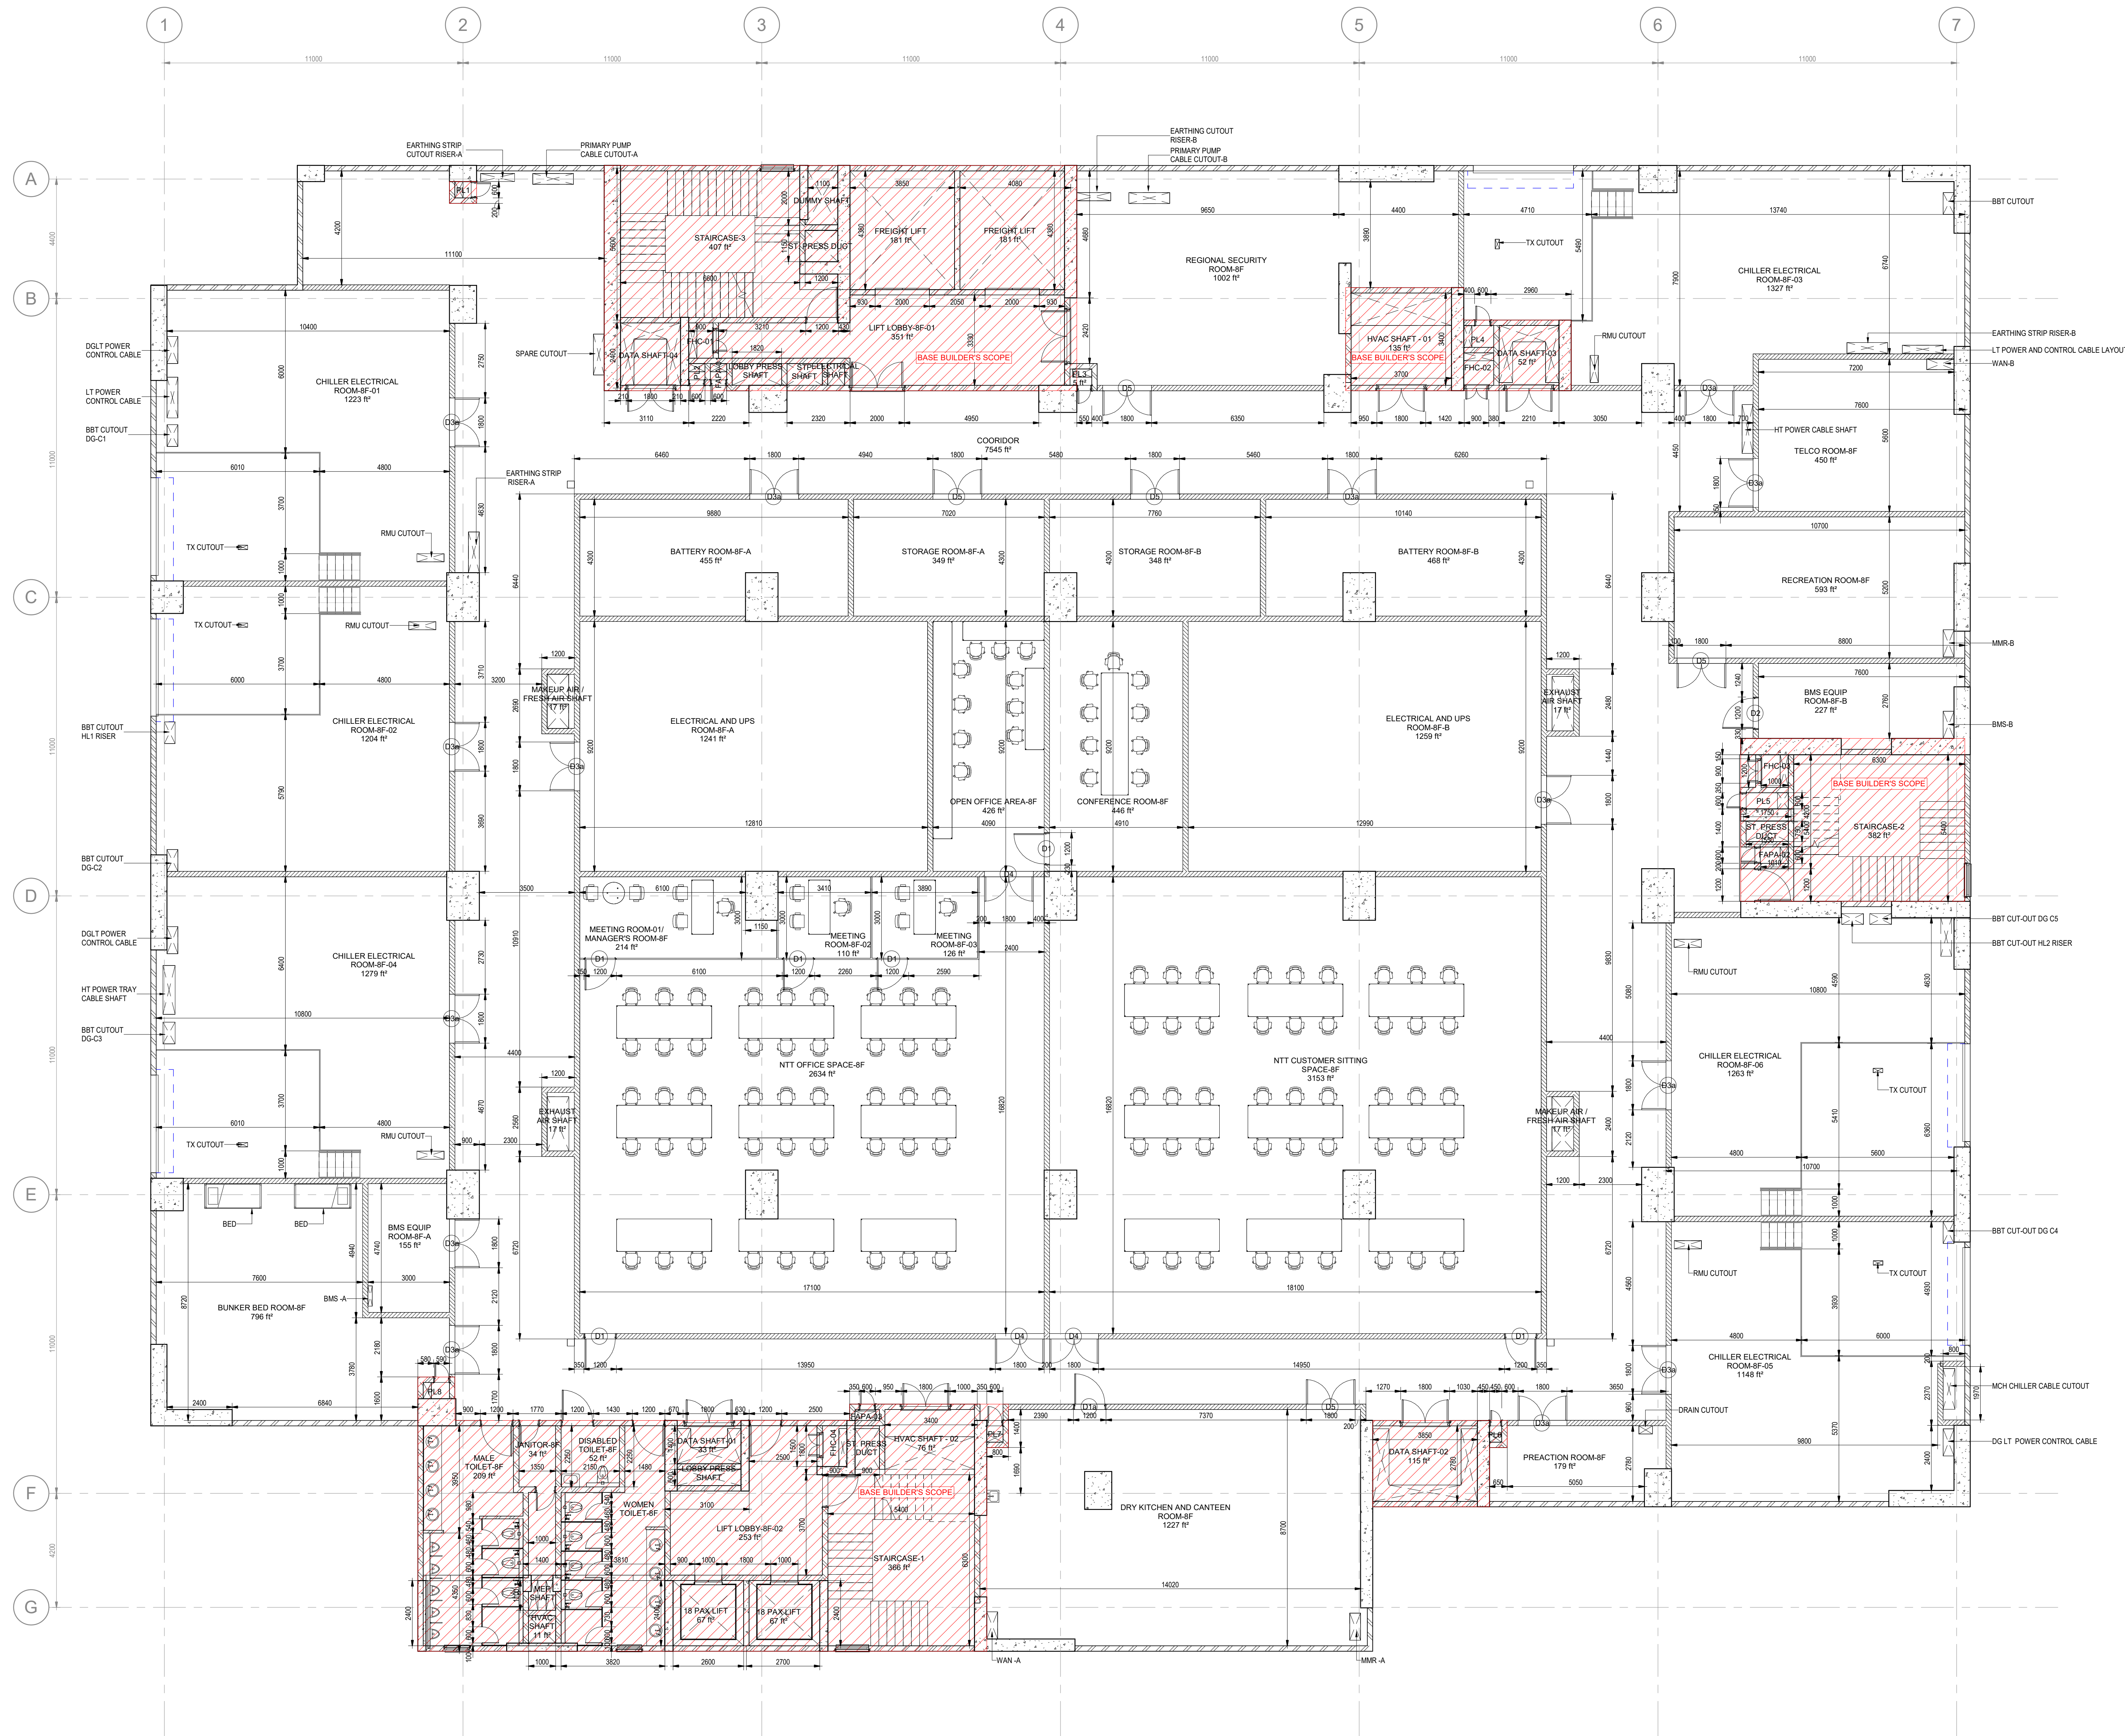


## LEGEND

SYMBOL	DESCRIPTION
---	BASIC WALL 50MM
---	BASIC WALL 150MM
---	BASIC WALL 180MM
---	BASIC WALL 300MM
---	CONCRETE WALL

DC BUILDING EIGHTH FLOOR CIVIL LINE-OUT LAYOUT  
1 : 100

8F Door Schedule With Specification					
Type	Description	DOOR SIZE	Count	Door Item Specification	
D1	SINGLE DOOR	1200 X 2400	6	6mm THK. Clear Glass with anodized 20 Micron Aluminum Section Door Spring with Auto Closure.	
D1a	SINGLE DOOR	1200 X 2400	1	30 mm THK. Single Shutter Flush Door finished with 1mm THK. Laminate Sheet	
D2	SINGLE DOOR	1200 X 2800	1	Single leaf Metal fire door- conforming to BS-476 part 20 & 22 with standard handle controlled lock for wooden and metal doors.	
D3a	DOUBLE DOOR	1800 X 2800	14	Double leaf Metal fire door- conforming to BS-476 part 20 & 22 with standard handle controlled lock for wooden and metal doors.	
D4	DOUBLE DOOR	1800 X 2400	3	6mm THK. Clear Glass with anodized 20 Micron Aluminum Section Door Spring with Auto Closure.	
D5	DOUBLE DOOR	1800 X 2400	5	30 mm THK. Double Shutter Flush Door finished with 1mm THK. Laminate Sheet	
Grand total			30		

R1 GOOD FOR CONSTRUCTION 06/08/2024 S.B. S.K. S.R.  
R2 GOOD FOR CONSTRUCTION 26/07/2024 S.B. S.K. S.R.  
REV DESCRIPTION DATE DRAWN BYR CITY OFFICES, 10th FLOOR, EMAIL: CAD@SUDLOWS.COM  
GHATKOPAR (WEST), MUMBAI - 400 056. WWW.SUDLOWS.IN  
WWW.SUDLOWS.COM

Client:



Site:

DC4 BLR

Status:

GFC

Scale:

1:100

Date Created: 26/07/2024 Drawn By: S.B. Sheet Size: A0

Drawing Title:  
DC BUILDING  
EIGHTH FLOOR  
CIVIL LINE-OUT LAYOUT

Project No.:

IN70052

Rev:

R1

Drawing No.:

SUD-NTT-BLRDC4-DC-8F-CL-21